
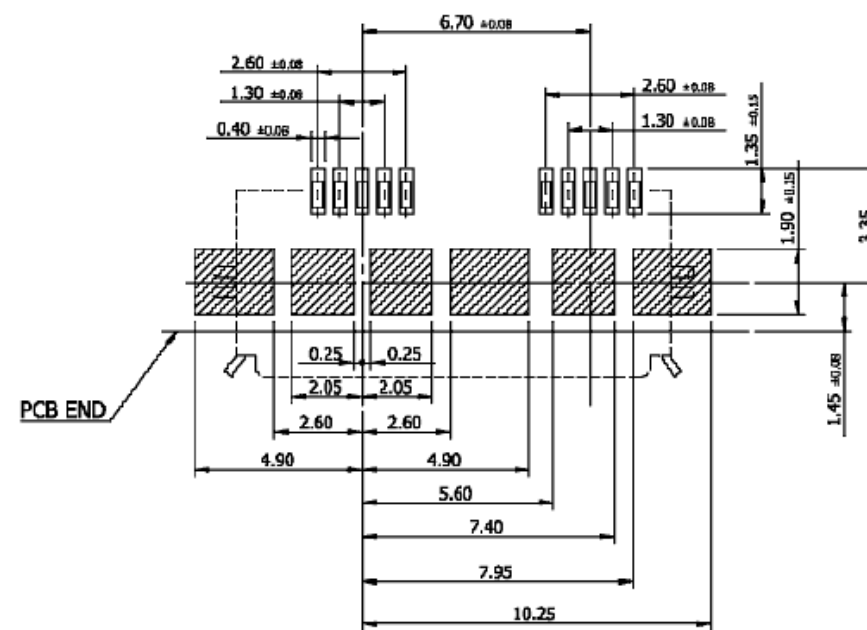
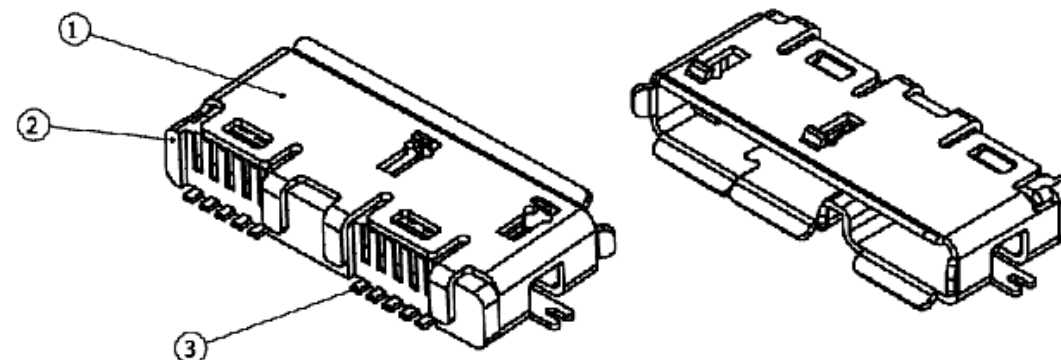


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH IS PROHIBITED.

CONFIDENTIAL

Customer approved

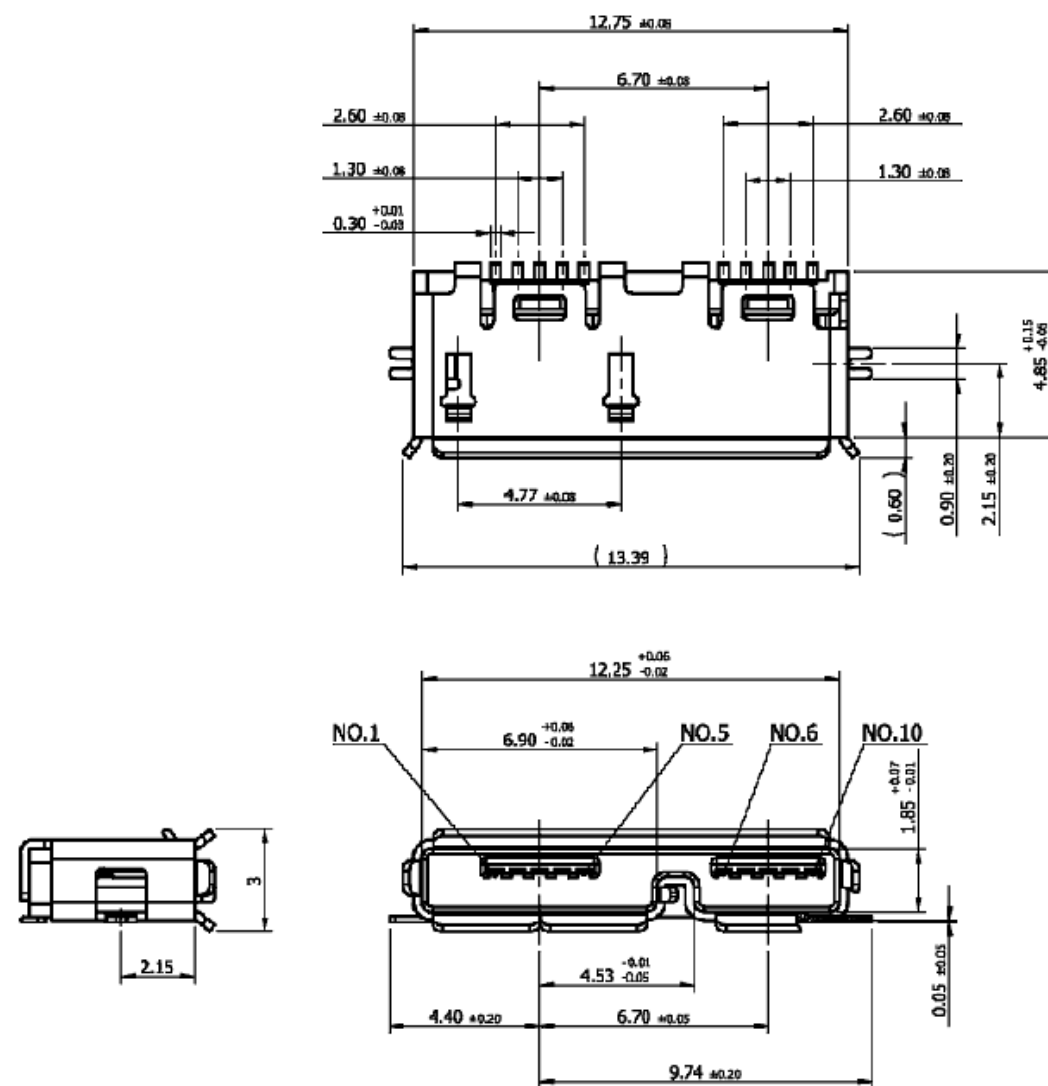

NOTE :

1. COPLANARITY OF SMT TERMINAL IS 0.1mm MAX.
2. PACKING METHOD: ALL CONNECTOR ARE PACKED USING TAPE & REEL METHODS.
(SEE PAPER 2 OF 2)
3. PACKING QUANTITY: 1200 PCS / REEL

| | | | | | |
|-----|-------------|----------|----------------------------|----------------------------|--------|
| 3 | Contacts | 10 | Copper Alloy | Au /Tin(Sn) over Nickel | |
| 2 | Housing | 1 | Thermoplastic high-Temp | | |
| 1 | Shell | 1 | Stainless steel Alloy | Tin(Sn) over Nickel | |
| NO. | Description | Quantity | Material | Finish | Remark |




Yamaichi acts with all markings of the product exclusively on behalf of the customer as service provider and not as distributor. Yamaichi is not aware of the customer's end use/application. The customer indemnifies Yamaichi from any liability towards third parties in connection with the marking - with the exception of the legal exclusions of liability according to § 309 No. 7 BGB. Specification/Drawing subject to alteration without prior notice

RoHS compliant acc. to directive 2011/65/EU

| | | | | | |
|--|--|----------------------|----------------------|---|------------|
| Unless otherwise specified : Dimensions are in millimeters TOLERANCES X.X ± 0.2 X.XX ± 0.1 ANGLE ± 3° | | REV. | REVISION DESCRIPTION | INITIALS | REV. DATE |
| Order / Article No. 24-02628 | | 003 | drawing updated | T011 | 26.02.2020 |
| NOTES: A3 | | DO NOT SCALE DRAWING | | CLASSIFICATION: Micro USB3.0, AB type, SMT Female, 10 contacts USB-3.0MC-10AB-S9-BL-R | |
| WEIGHT: 0.07 | | SUBREV: 01 | | DWG NO.: Customer-P(028)A130 | |
| | | | | REVISION: 003 | |
| | | | | SCALE: 10:1 | |
| | | | | SHEET 1 OF 2 | |
| | | | | A3 - ASSEMBLY | |



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH IS PROHIBITED.

CONFIDENTIAL

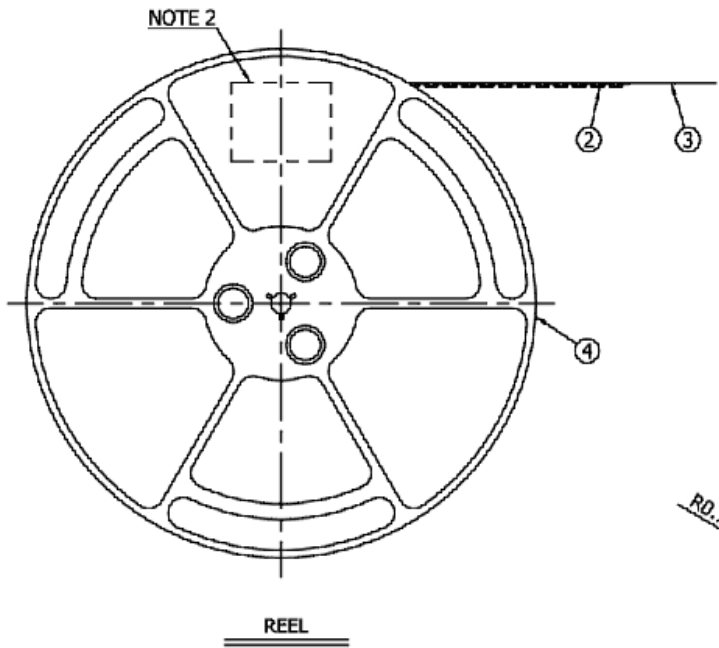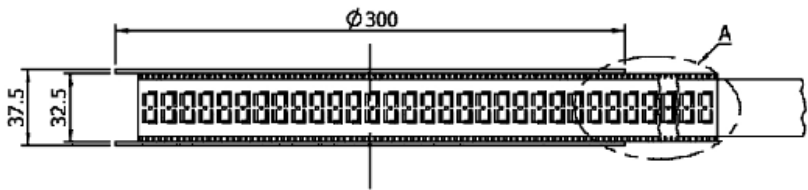


C VIEW DETAIL
SCALE 5:1

NOTE :
1. THE LABEL IS TO BE ATTACHED ON THE MAGAZINE AS SHOWN.

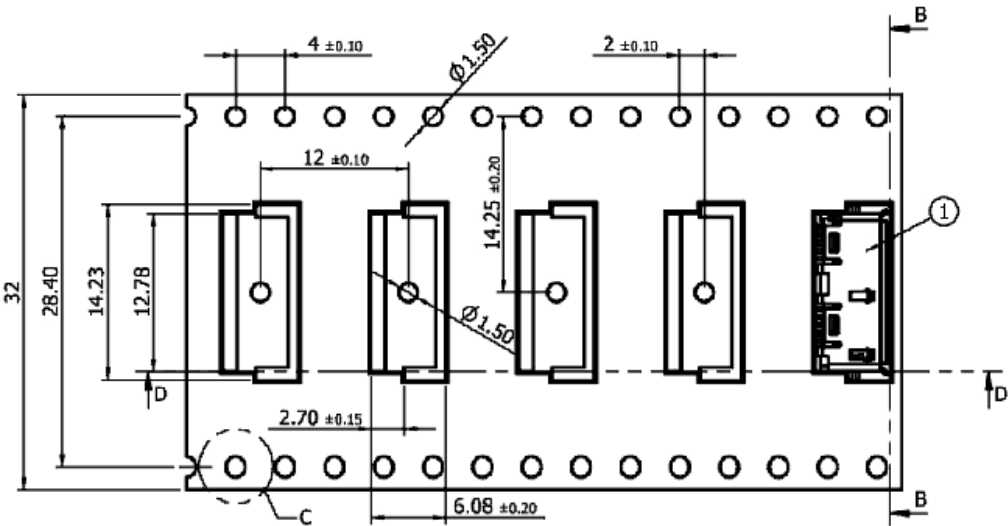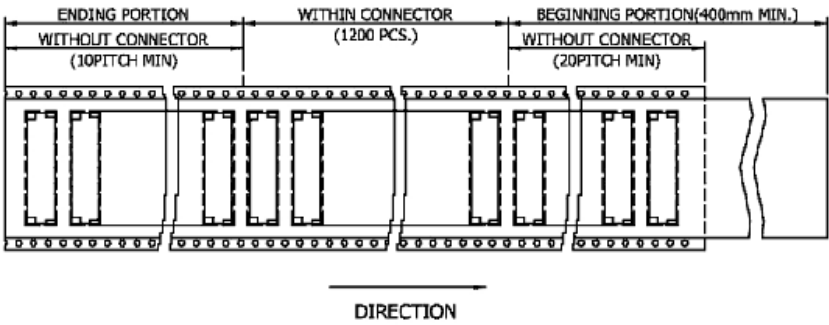

A VIEW DETAIL
SCALE 2:1



B-B SECTION
SCALE 2:1



D-D SECTION
SCALE 2:1

| | | | | | |
|-----|--------------|----------|----------|--------|---------------|
| 4 | REEL | 1 | | | |
| 3 | COVER-TAPE | | PET | | |
| 2 | CARRIER-TAPE | | PS | | |
| 1 | CONNECTOR | 1200 | | | 738227120100H |
| NO. | DESCRIPTION | QUANTITY | MATERIAL | FINISH | REMARKS |

| | | | | | |
|--|--|----------------------|----------------------|------------------------------|------------|
| Unless otherwise specified : Dimensions are in millimeters TOLERANCES X.X ± 0.2 X.XX ± 0.1 ANGLE ± 3° | | REV. | REVISION DESCRIPTION | INITIALS | REV. DATE |
| | | △ | | | |
| | | △ | | | |
| | | △ | | | |
| | | △ | | | |
| Order / Article No. 24-02628 | | 003 | drawing updated | T011 | 26.02.2020 |
| NOTES: A3 | | DO NOT SCALE DRAWING | | CLASSIFICATION: | |
| | | NAME | DATE | Micro USB3.0, AB type, SMT | |
| | | CREATED | MEZ 31.10.2013 | Female, 10 contacts | |
| | | MODIFIED | T022 04.03.2020 | USB-3.0MC-10AB-S9-BL-R | |
| | | RELEASED | T011 02.04.2020 | DWG NO.: Customer-P(028)A130 | |
| | | | | REVISION: 003 | |
| WEIGHT: 0.07 | | SUBREV: 01 | | SCALE: 2:1 | |
| | | | | SHEET 2 OF 2 | |
| | | | | A3 - ASSEMBLY | |

Yamaichi acts with all markings of the product exclusively on behalf of the customer as service provider and not as distributor. Yamaichi is not aware of the customer's end use/application. The customer indemnifies Yamaichi from any liability towards third parties in connection with the marking - with the exception of the legal exclusions of liability according to § 309 No. 7 BGB. Specification/Drawing subject to alteration without prior notice

RoHS compliant acc. to directive 2011/65/EU