


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH IS PROHIBITED.

CONFIDENTIAL

NOTES:

- 1.0 Rating:
1.1 Voltage: 30 VAC (R.M.S)
1.2 Temperature Range: -20°C To +60°C
Operating: 0°C To +50°C^
2.0 Electrical Characteristic:
2.1 Contact Resistance: 30 milliohms Maximum Initial.
2.2 Insulation Resistance: 1.000 Megaohms Minimum
2.3 Dielectric Withstanding Voltage: 500 VAC For One Minute At Sea Level
3.0 Recommended Pc Board Thickness of 1.57 mm
3.1 This Allow for a Panel Thickness of 2.67 mm Maximum If the Receptacle Connector is Mounted Behind A Panel.
3.2 Recommended PC Board Mounting Dimmension Refer Figure A

DIM: 2.80

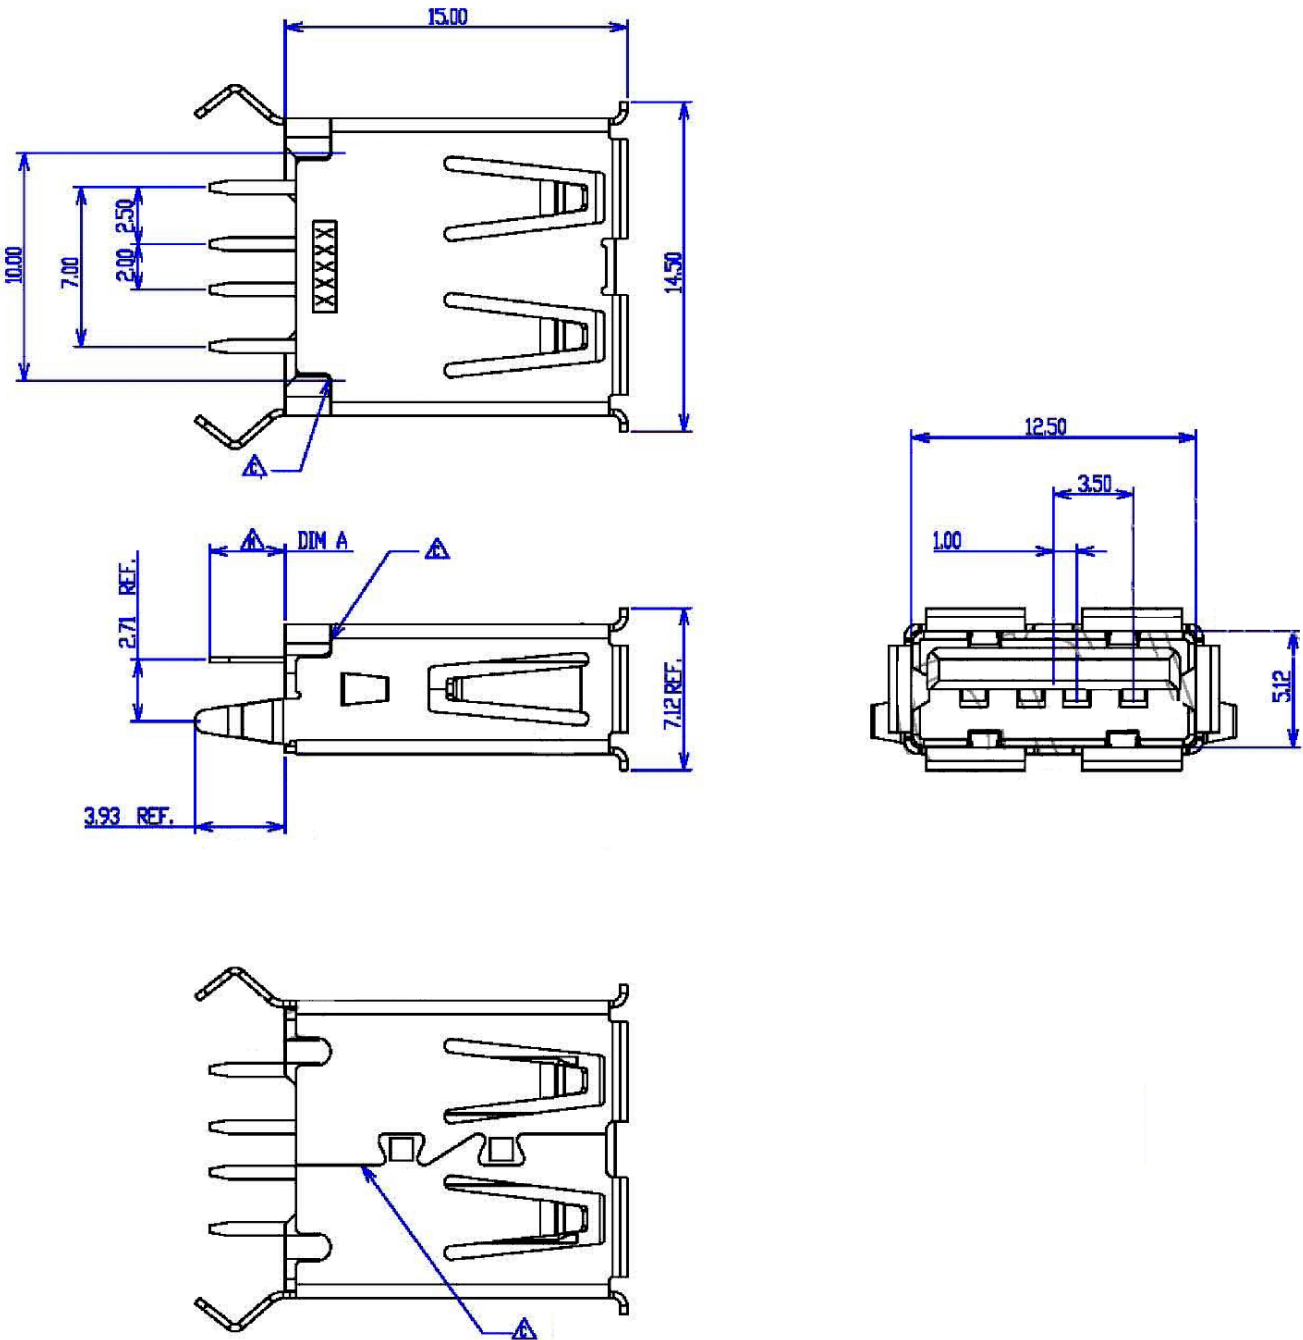

BILL OF MATERIAL:

3	CONTACT	4	COPPER ALLOY
2	HOUSING	1	
1	SHELL	1	COPPER ALLOY
NO	PART NAME	QTY	MATERIAL

Specification/Drawing subject to alteration without prior notice

Unless otherwise specified : Dimensions are in millimeters X. ±0.38 X° ±3.0° .X ±0.25 .X° ±2.0° .XX ±0.13 .XX° ±1.0° .XXX ±0.05		REV.	REVISION DESCRIPTION	INITIALS	REV. DATE	 YAMAICHI ELECTRONICS		
		△						
		△						
		△						
		E	Drawing Updated	MEZ	01.06.2015			
Order / Article No. 24-00468		D	Solder profile & tol. added	MOH	19.05.2015	CLASSIFICATION: USB-A single port 180°PTH		
		DO NOT SCALE DRAWING						
NOTES:			NAME	DATE	TITLE: USB-A-004			
		ANGLE PROJECTION:	DESIGN	29.10.2004				
		 THIRD	DRAWN	MEZ 01.06.2015				
			CHECKED	SLS 19.01.2016				
					DWG NO.: Customer-P(028)A21			
WEIGHT:					SCALE: 5:1		SHEET1 OF 2	REVISION: E
							A3 - ASSEMBLY	

RoHS compliant acc. to directive 2011/65/EU

