



2





1

С

D








H

1.80

2.71

10.30


3




5

4

3D VIEW



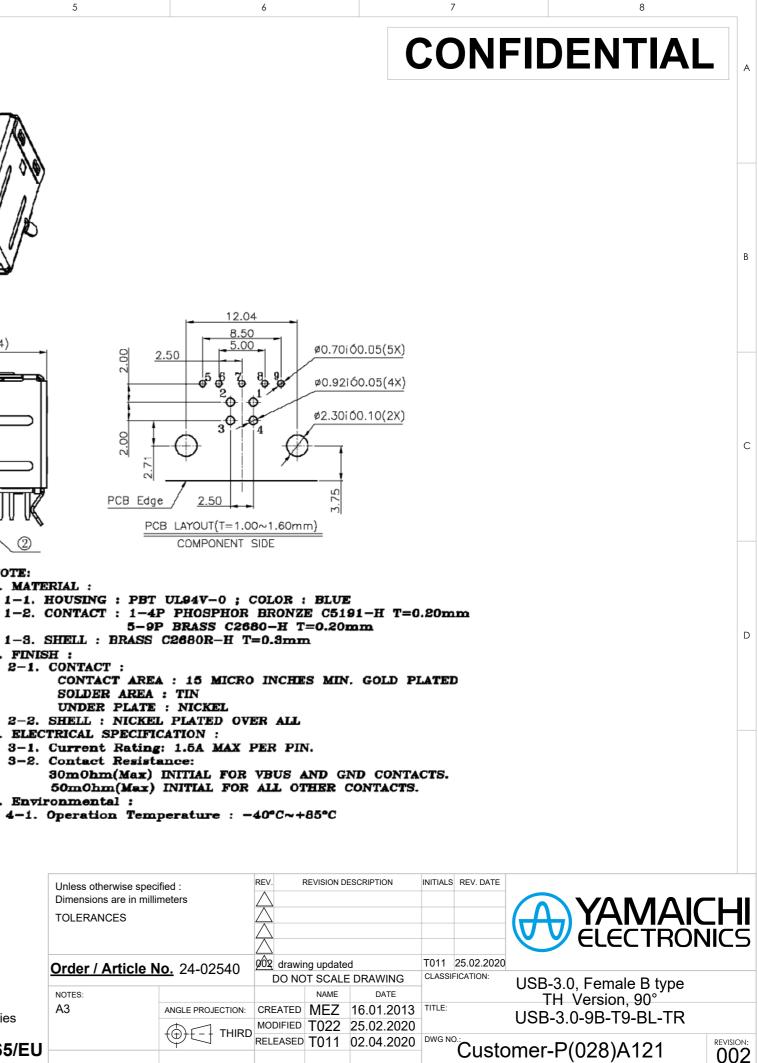

NOTE:

1. MATERIAL :

- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLUE
- 1-3. SHELL : BRASS C2680R-H T=0.3mm
- 2. FINISH :
- 2-1. CONTACT ;
- - SOLDER AREA : TIN
- 3. ELECTRICAL SPECIFICATION :
 - 3-1. Current Rating: 1.5A MAX PER PIN.
 - 3-2. Contact Resistance:

50mOhm(Max) INITIAL FOR ALL OTHER CONTACTS.

4. Environmental :

4-1. Operation Temperature : -40°C~+85°C

					Unless otherwise spec Dimensions are in milli TOLERANCES				
				Order / Article No. 24-02540		DO NOT SCALE DRAWING			
Yamaichi acts with all markings of the product exclusively on behalf of the customer as service provider and not as distributor.					NOTES: A3	ANGLE PROJECTION:	CREATED		16.01.20
Yamaichi is not aware of the customer's end use/application. The customer indemnifies Yamaichi from any liability towards third parties in connection with the marking - with the exception of the legal exclusions of liability according to § 309 No. 7 BGB.									25.02.20
Specification/Drawing subject to alteration without prior notice RoHS compliant acc. to directive 2011/65/EU							RELEASED	T011	02.04.20
1	2	3	4		WEIGHT: 1.47		subrev01		

80160.20

2.00

2.00

0

SHEET 1 OF 1 A3 - ASSEMBLY SCALE: 2:1