


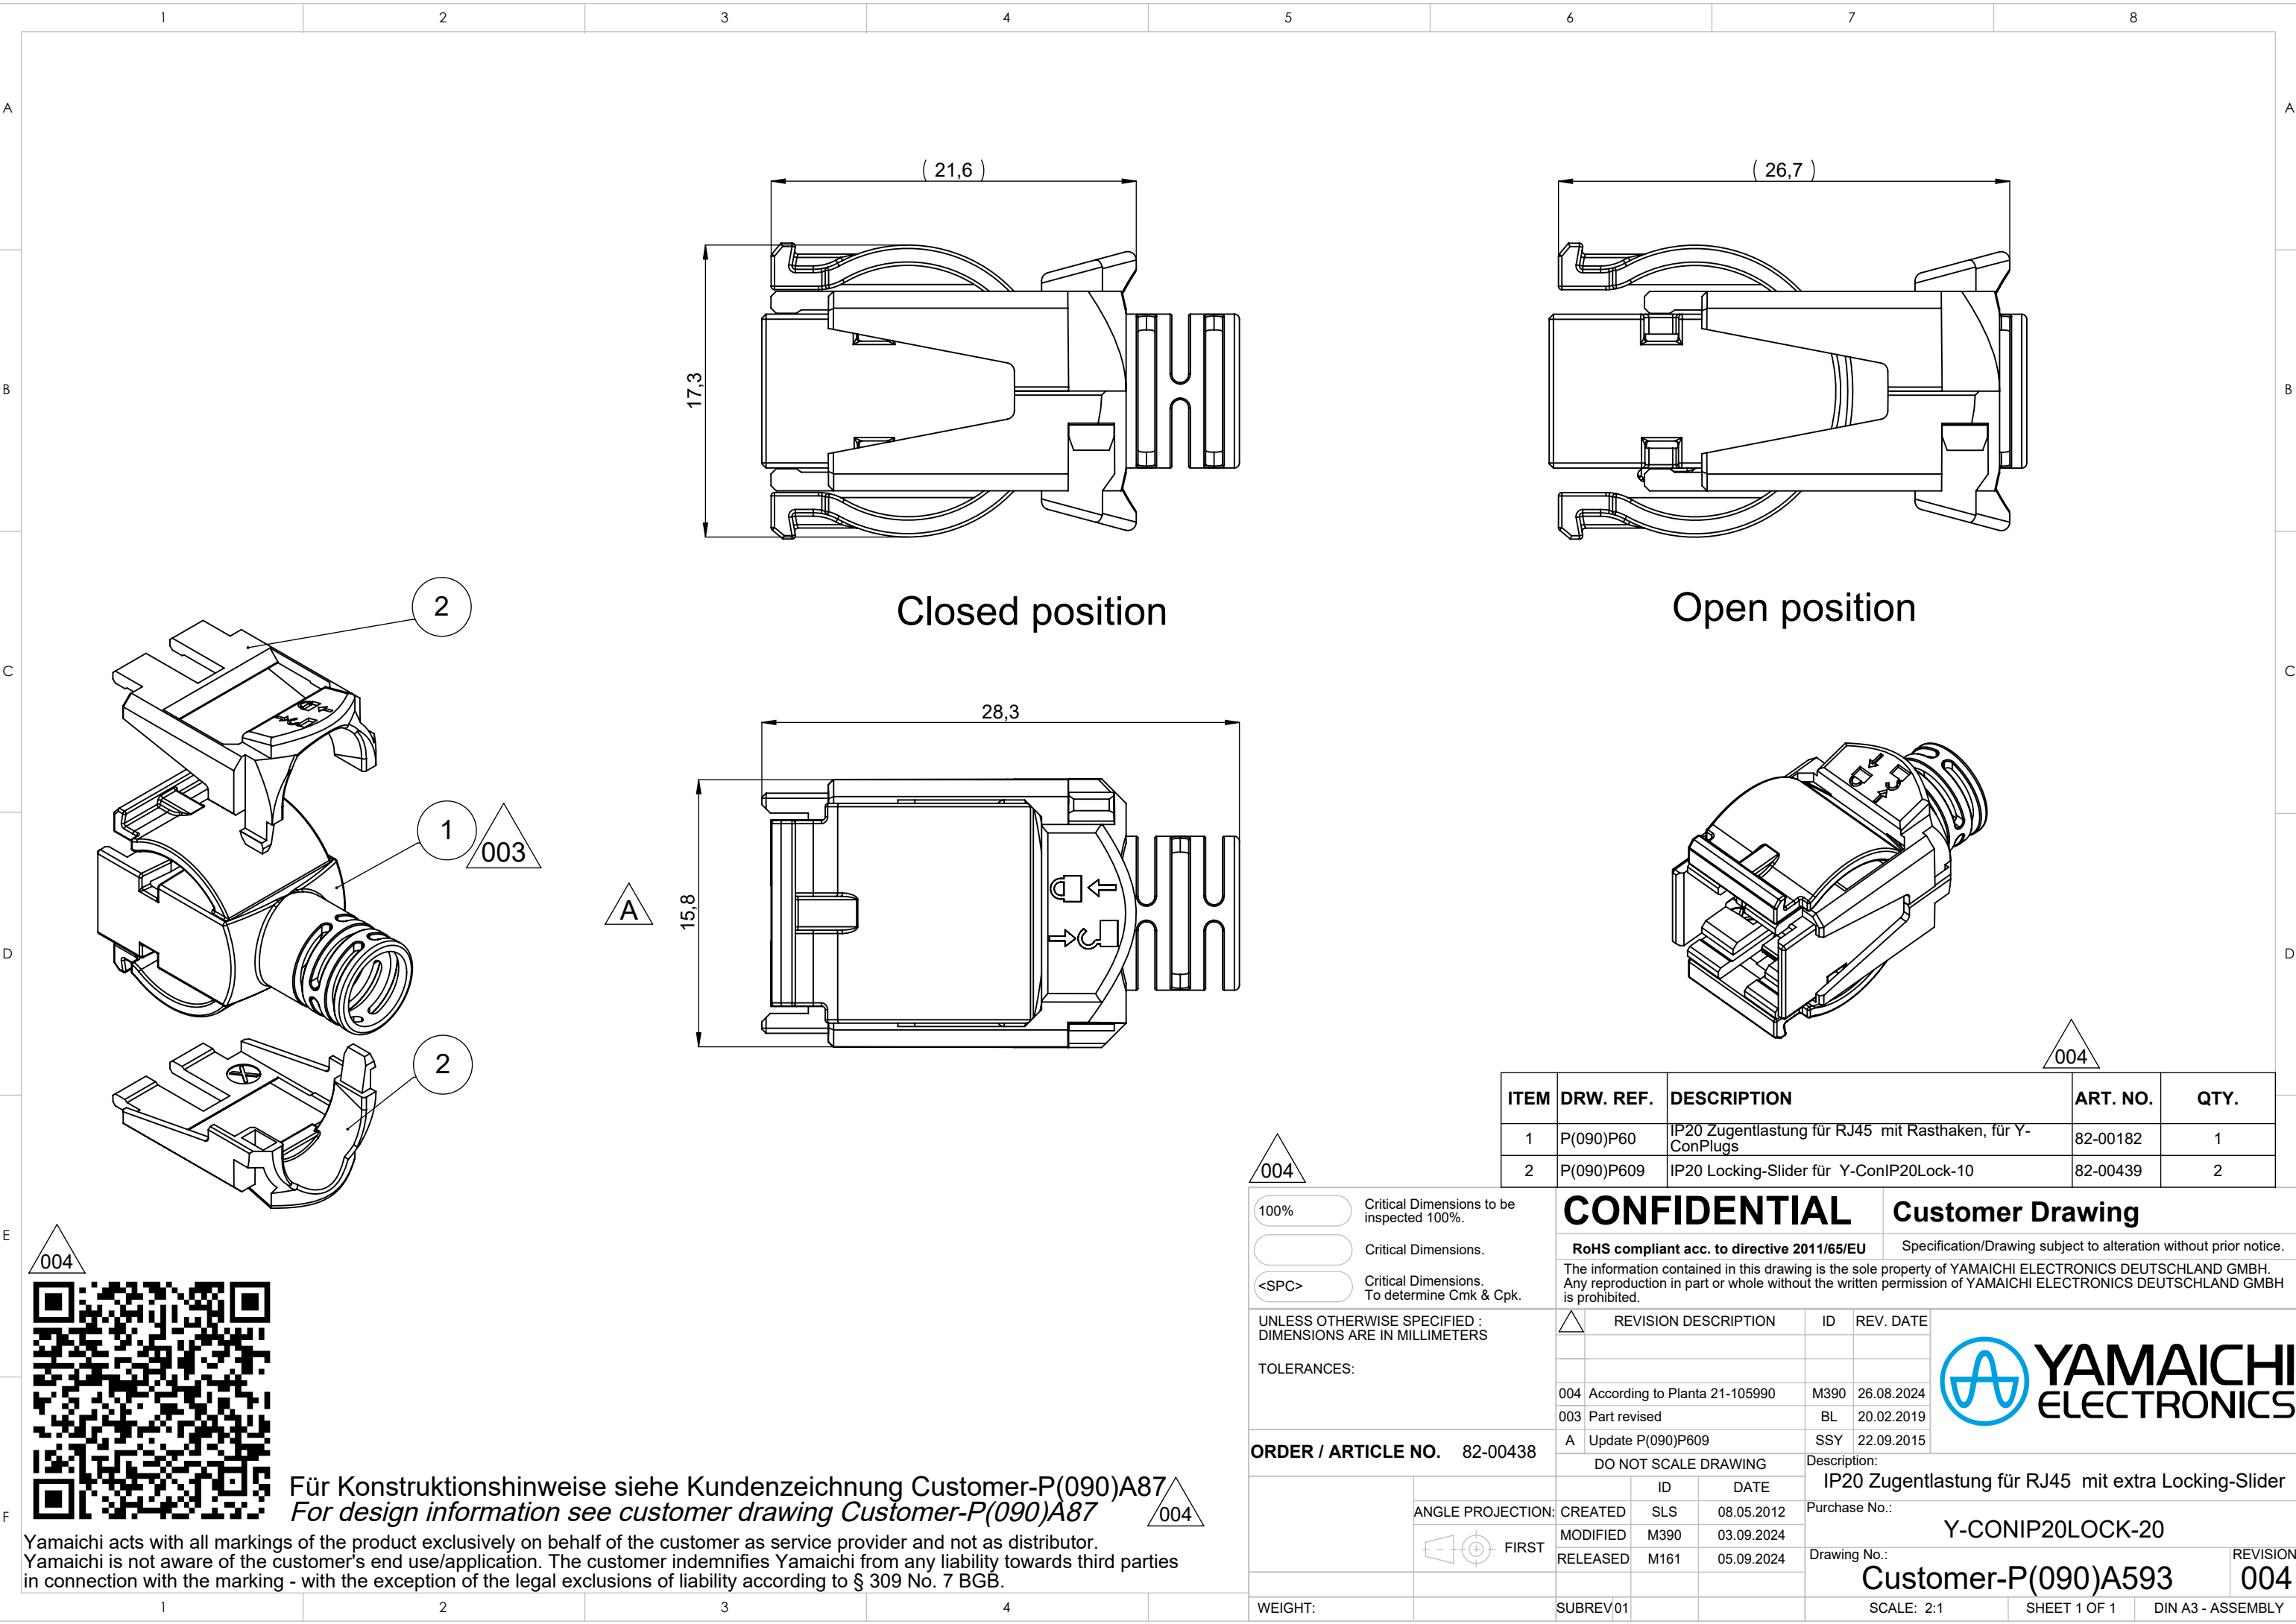

Für Konstruktionshinweise siehe Kundenzeichnung Customer-P(090)A87
For design information see customer drawing Customer-P(090)A87

Yamaichi acts with all markings of the product exclusively on behalf of the customer as service provider and not as distributor. Yamaichi is not aware of the customer's end use/application. The customer indemnifies Yamaichi from any liability towards third parties in connection with the marking - with the exception of the legal exclusions of liability according to § 309 No. 7 BGB.

004

100%

Critical Dimensions to be inspected 100%.

Critical Dimensions.

<SPC>

Critical Dimensions. To determine Cmk & Cpk.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:

ORDER / ARTICLE NO. 82-00438

ANGLE PROJECTION: FIRST

WEIGHT:

DO NOT SCALE DRAWING

ID	DATE
SLS	08.05.2012
M390	03.09.2024
M161	05.09.2024

SUBREV01

CONFIDENTIAL

Customer Drawing

RoHS compliant acc. to directive 2011/65/EU

Specification/Drawing subject to alteration without prior notice.

The information contained in this drawing is the sole property of YAMAICHI ELECTRONICS DEUTSCHLAND GMBH. Any reproduction in part or whole without the written permission of YAMAICHI ELECTRONICS DEUTSCHLAND GMBH is prohibited.

REVISION	DESCRIPTION	ID	REV. DATE
004	According to Planta 21-105990	M390	26.08.2024
003	Part revised	BL	20.02.2019
A	Update P(090)P609	SSY	22.09.2015

Description:
IP20 Zugentlastung für RJ45 mit extra Locking-Slider

Purchase No.:
Y-CONIP20LOCK-20

Drawing No.:
Customer-P(090)A593

REVISION:
004

SCALE: 2:1

SHEET 1 OF 1

DIN A3 - ASSEMBLY