
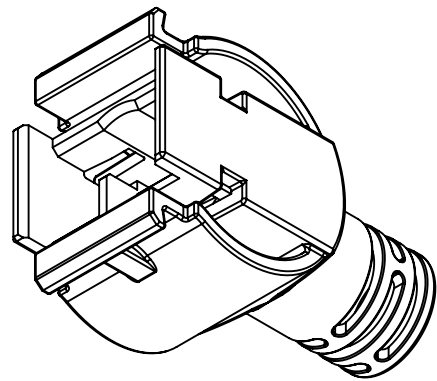
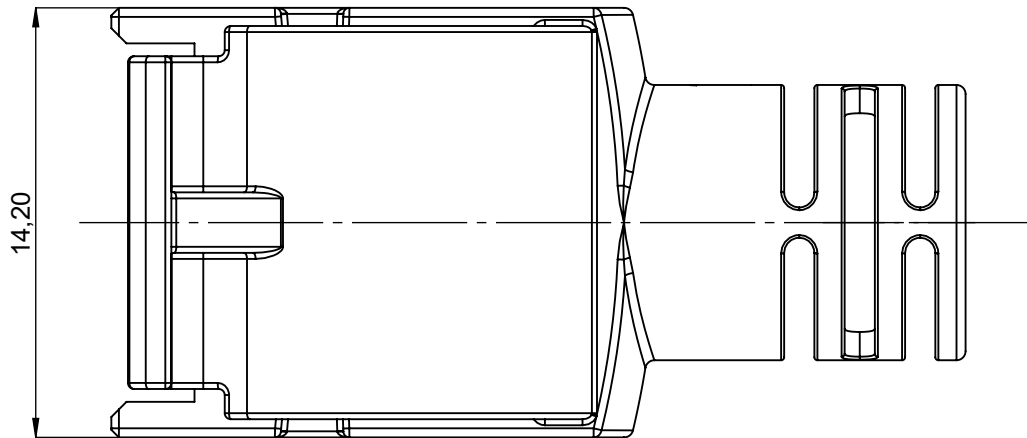
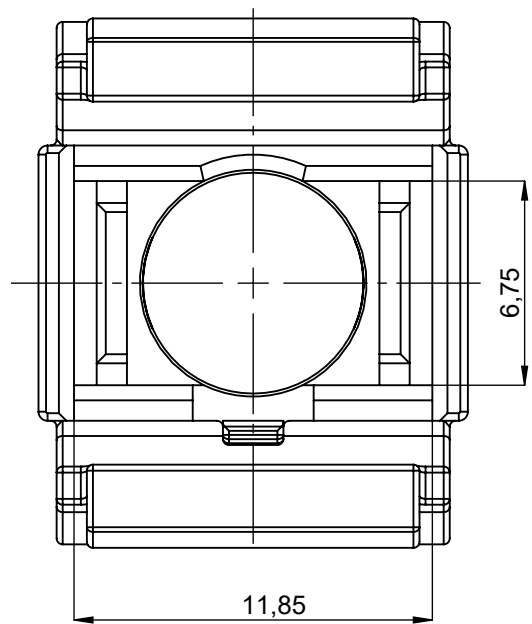
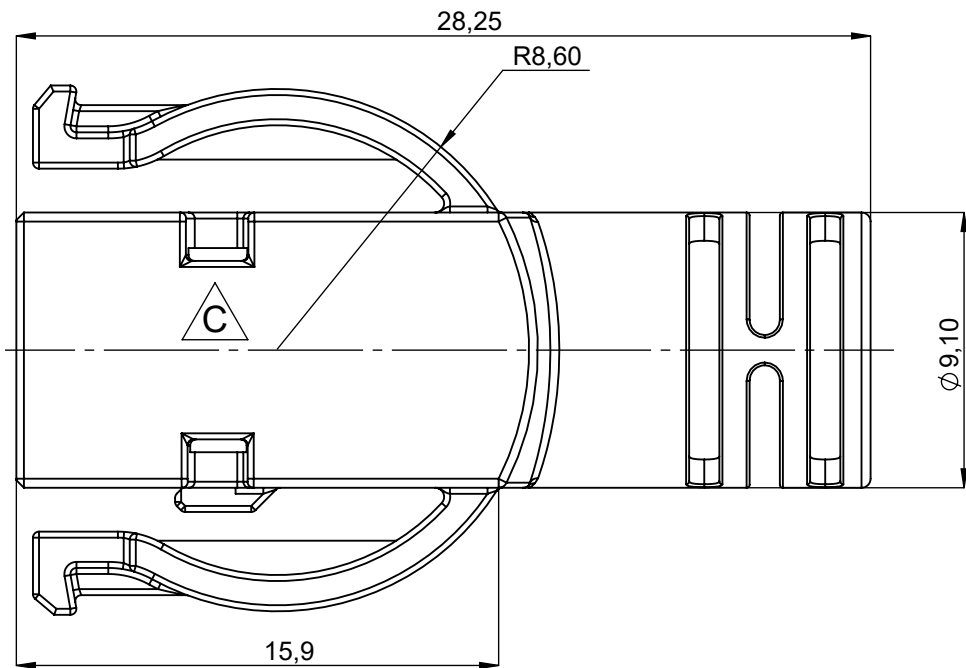


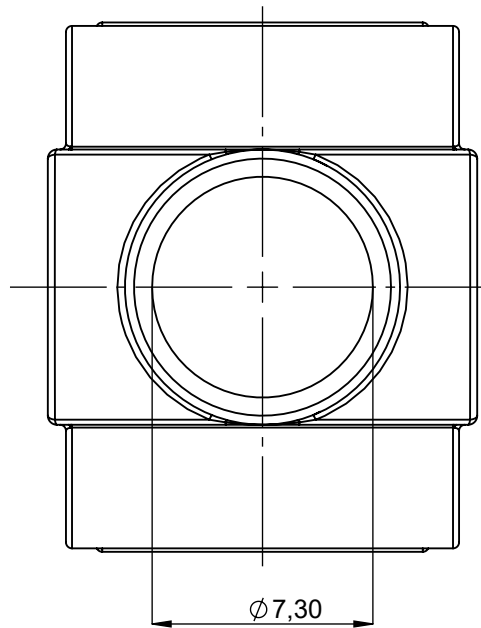

Für Konstruktionshinweise siehe Kundenzeichnung Customer-P(090)A87
For design information see customer drawing Customer-P(090)A87

KUNDENFREIGABE / CUSTOMER APPROVAL

Firma / Company :

Unterschrift / Signature : Datum / Date :

100%		Critical Dimensions to be inspected 100%.
		Critical Dimensions.
<SPC>		Critical Dimensions. To determine Cmk & Cpk.
MATERIAL: Polyamid, UL94 V-0		
PLATING:		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		
PART FREE OF SCRATCHES, BURR, OIL, DUST AND GREASE		
TOLERANCES: DIN 16742 TG5		
EDGES:		
ANGLE PROJECTION:		
FIRST		
ORDER / ARTICLE NO. 82-00182		
WEIGHT:		

CONFIDENTIAL			Customer Drawing		
RoHS compliant acc. to directive 2011/65/EU			Specification/Drawing subject to alteration without prior notice.		
The information contained in this drawing is the sole property of YAMAICHI ELECTRONICS DEUTSCHLAND GMBH. Any reproduction in part or whole without the written permission of YAMAICHI ELECTRONICS DEUTSCHLAND GMBH is prohibited.					
△	REVISION DESCRIPTION		ID	REV. DATE	
005	According to Planta 21-105990		M390	23.08.2024	
C	Geometry optimised		BL	23.01.2019	
B	Material infos detailed		RA	22.06.2015	
DO NOT SCALE DRAWING			Description: IP20 Zugentlastung für RJ45 mit Rasthaken, für Y-ConPlugs		
ID		DATE		Purchase No.:	
CREATED	BL	17.01.2019		Y-CONIP20LOCK-10	
MODIFIED	M390	05.09.2024		Drawing No.:	
RELEASED	M161	05.09.2024		Customer-P(090)P60	
SUBREV01				REVISION: 005	
SCALE: 2:1			SHEET 1 OF 1		DIN A3 - PART

