


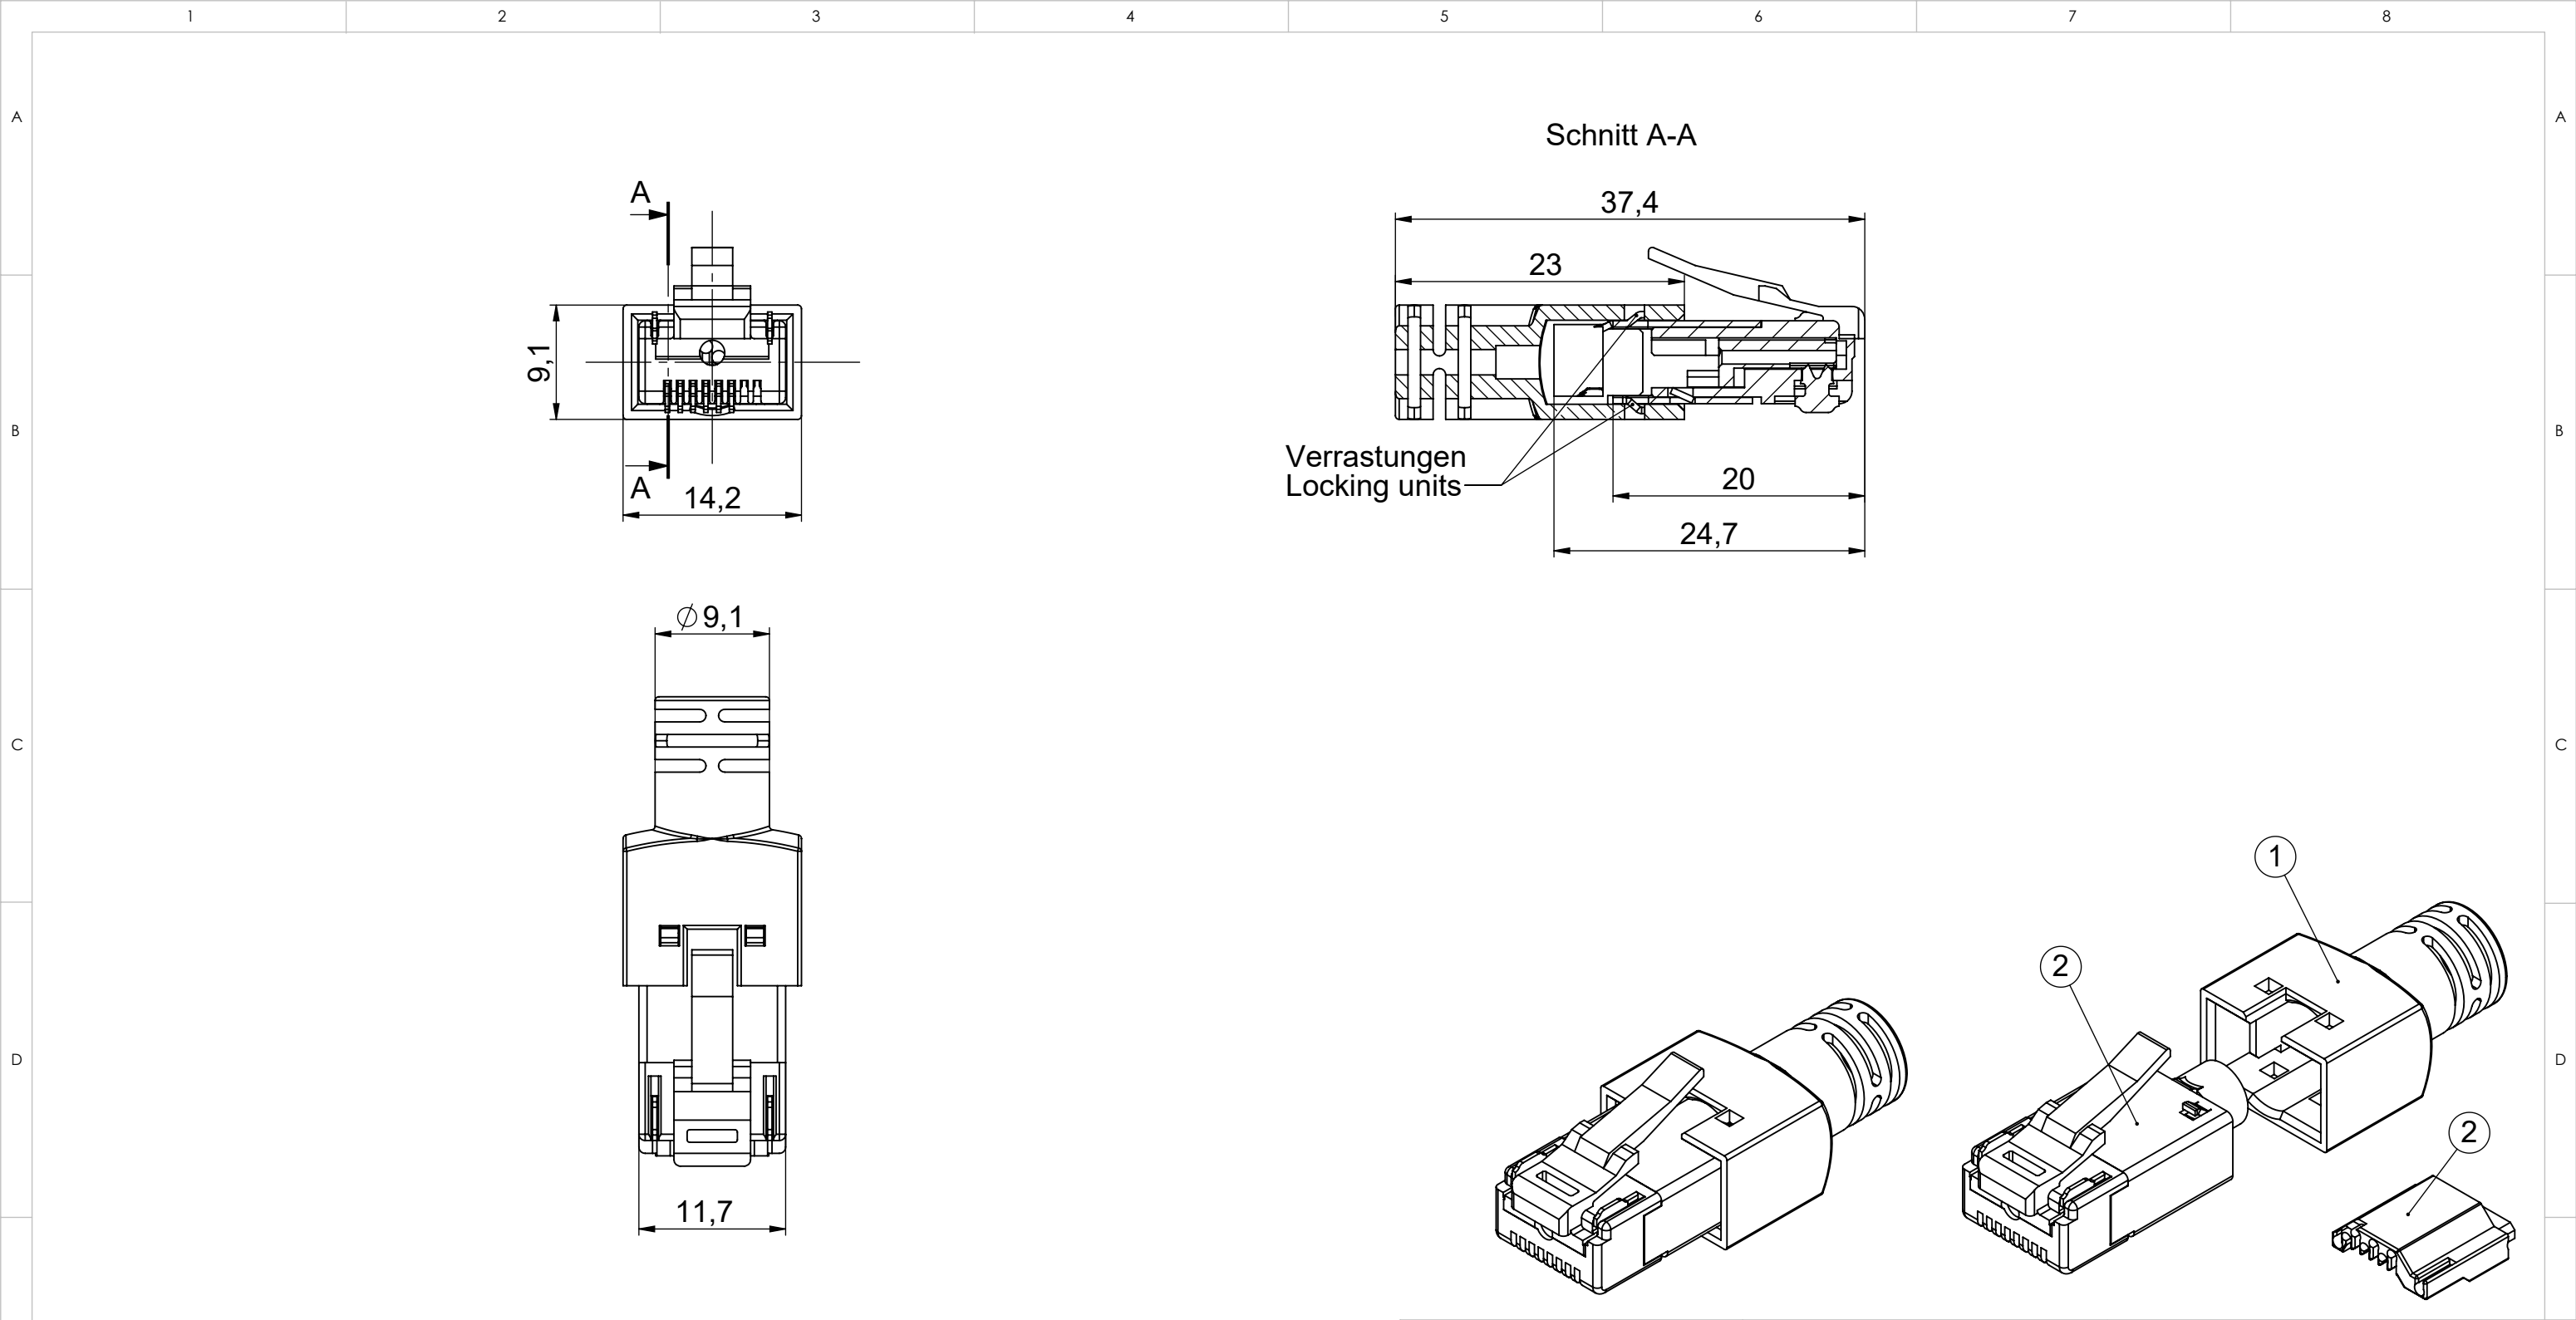

Y-ConKit-13: Plug with power contacts (Y-ConPlug-31/ 6+2)

Pos.	BIOS_Descr1	BIOS_PurchNo	BIOS_DrawNo	Material	BIOS_ArtNo	UL-Listing	ASSY_1/QTY.
1	Y-ConAS-11 strain relief	Y-ConAS-11	P(090)P12	PA 66 UL V-0 (black)	82-00058	UL94-V0	1
2	Y-Con RJ45 Stecker, 8(6)+2	Y-CONPLUG-31	P(090)A83		82-00137	UL94-V0	1

Yamaichi acts with all markings of the product exclusively on behalf of the customer as service provider and not as distributor. Yamaichi is not aware of the customer's end use/application. The customer indemnifies Yamaichi from any liability towards third parties in connection with the marking - with the exception of the legal exclusions of liability according to § 309 No. 7 BGB.

100%

Critical Dimensions to be inspected 100%.

Critical Dimensions.

<SPC>

Critical Dimensions.
To determine Cmk & Cpk.

UNLESS OTHERWISE SPECIFIED :
DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:
ISO 2768-1 f
ISO 2768-2 H

ORDER / ARTICLE NO. 82-00171

WEIGHT:

CONFIDENTIAL

Customer Drawing

RoHS compliant acc. to directive 2011/65/EU

The information contained in this drawing is the sole property of YAMAICHI ELECTRONICS DEUTSCHLAND GMBH. Any reproduction in part or whole without the written permission of YAMAICHI ELECTRONICS DEUTSCHLAND GMBH is prohibited.

REVISION DESCRIPTION

ID

REV. DATE

002 drawing updated

M356 19.08.2021

DO NOT SCALE DRAWING

ANGLE PROJECTION: FIRST

CREATED JH 27.11.2003

MODIFIED M348 22.12.2021

RELEASED M189 22.12.2021

SUBREV01

SCALE: 2:1

SHEET 1 OF 1

DIN A3 - ASSEMBLY

YAMAICHI
ELECTRONICS

Description: IP20 Selbstmontage Kit, 8(6)+2
Y-ConPlug-31, Y-ConAS-11

Purchase No.: Y-CONKIT-13

Drawing No.: Customer-P(090)A113

REVISION: 002