


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF YAMAICHI ELECTRONICS DEUTSCHLAND GmbH IS PROHIBITED.

CONFIDENTIAL

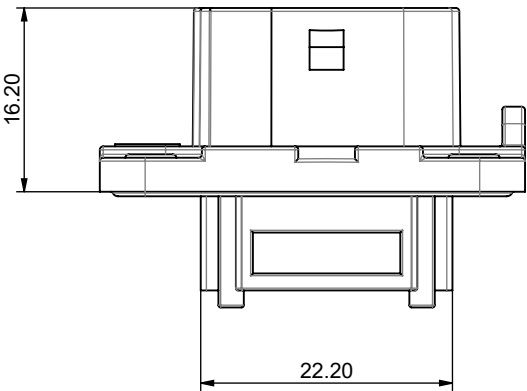



Environmental / Reliability :

Resistant against: Fuel, Lubricants, Rain, ozone*.


Operation Temperature: -40°C to +85°C

IP Rating: IP67, IP68,IP69K*

*To be verified during qualification process

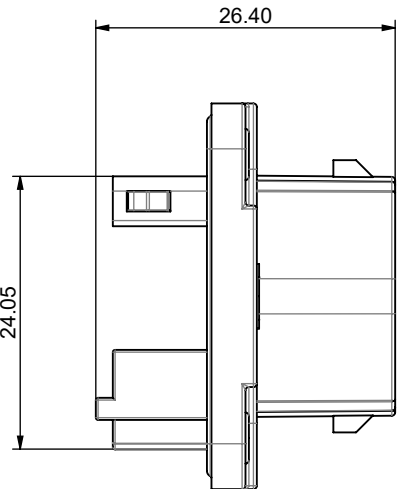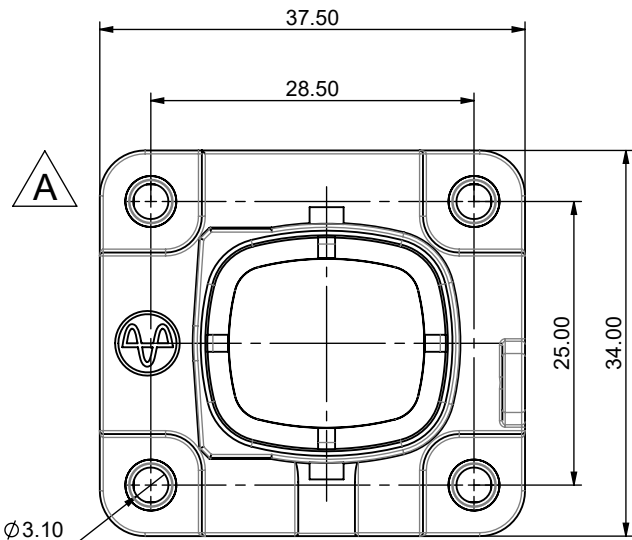



Required Panel Cut-Out

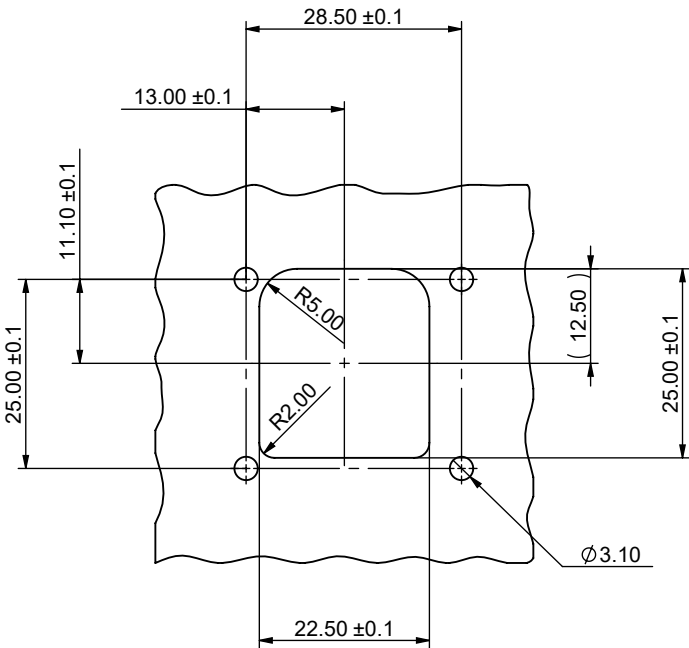

NOTE:

Recommended Tool for Panel cut-out on metal sheet:
• Y-ConFlange-Punch-1

ITEM NO.	DRAWING NUMBER	NAME	DESCRIPTION	QTY.
1	P1145P10	Y-CON FLANGE-40-BODY	Main body of Y-Con Flange-40	1
2	P1145P19	Bermolded Gasket	Dichtung für Y-ConFlange10 und 10-B HNBR	1
3	P1145P03	Y-CON FLANGE-40-FEDER	Locking spring for Y-ConFlange-40	1

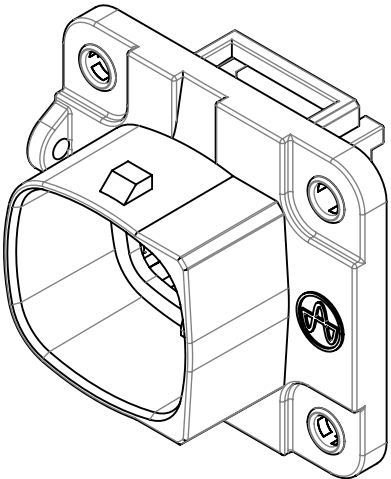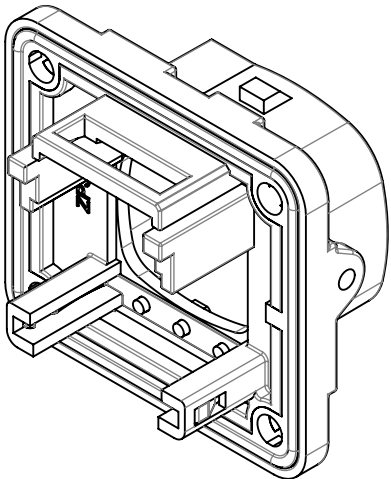

RoHS compliant acc. to directive 2011/65/EU

Critical Dimensions.
To determine Cmk and Cpk.

Specification/Drawing subject
to alteration without prior notice

Unless otherwise specified : Dimensions are in millimeters TOLERANCES ISO 2768-1 m (mittel)		REV.	REVISION DESCRIPTION		INITIALS	REV. DATE	YAMAICHI ELECTRONICS Deutschland GmbH	
								
								
								
		B	Update	MSP	28.06.2017			
Order / Article No. 82-00547		A	Flange modification	HAY	13.07.2011	CLASSIFICATION: IP67 Y-Con mounting flange, metal version, with integrated seal Y-CON FLANGE-40		
		DO NOT SCALE DRAWING						
NOTES:			NAME	DATE	TITLE: Customer-P1145A04			
	ANGLE PROJECTION:	DESIGN	MOB	15.10.2010				
	 FIRST	DRAWN	MSP	28.06.2017				
		CHECKED	BL	28.06.2017				
WEIGHT:					SCALE: 1.5:1	SHEET1 OF 1	A3 - ASSEMBLY	