


NEXT GENERATION OF SFPX FORM FACTORS SUPPORT 112G-PAM4 SIGNAL

SFP56
p/n CN109S-020-2001
1ch x 56G

SFP112G
p/n CN109S-020-2002
1ch x 112G



DSFP
MULTI-FIT FEATURE
p/n CN109S-022-0001

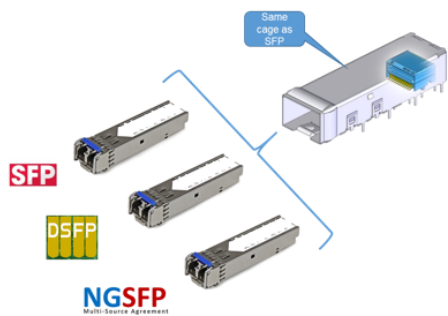

Up to 2ch x 112G (NGSFP)

NGSFP-DD
p/n CN109S-044-0001



4ch x 112G

PRODUCT FEATURES:

- Supports 112Gbps-PAM4 signal
- Custom heatsinks available

THROUGHPUT OF FORM FACTORS

	No of ch / Ch	No of Port in 1U	Total ch	Module Size
OSFP	8 _{ch}	16 x 2 = 32 _{slot}	8 x 32 = 256 _{ch}	22.58 x 20.98
QSFP-DD	4 _{ch} x 2 = 8 _{ch}	16 x 2 = 32 _{slot}	8 x 32 = 256 _{ch}	18.55 x 20.00
NGSFP-DD	2 _{ch} x 2 = 4 _{ch}	24 x 2 = 48 _{slot}	4 x 48 = 192 _{ch}	12.00 x 14.00
SFP-DD	1 _{ch} x 2 = 2 _{ch}	24 x 2 = 48 _{slot}	2 x 48 = 96 _{ch}	13.55 x 14.00
DSFP	2 _{ch}	24 x 2 = 48 _{slot}	2 x 48 = 96 _{ch}	13.55 x 14.00
SFP	1 _{ch}	24 x 2 = 48 _{slot}	1 x 48 = 48 _{ch}	13.55 x 14.00

THROUGHPUT

